


Iris U.S. Customer Service
800.323.9906
www.irisus.com



USIRISML15

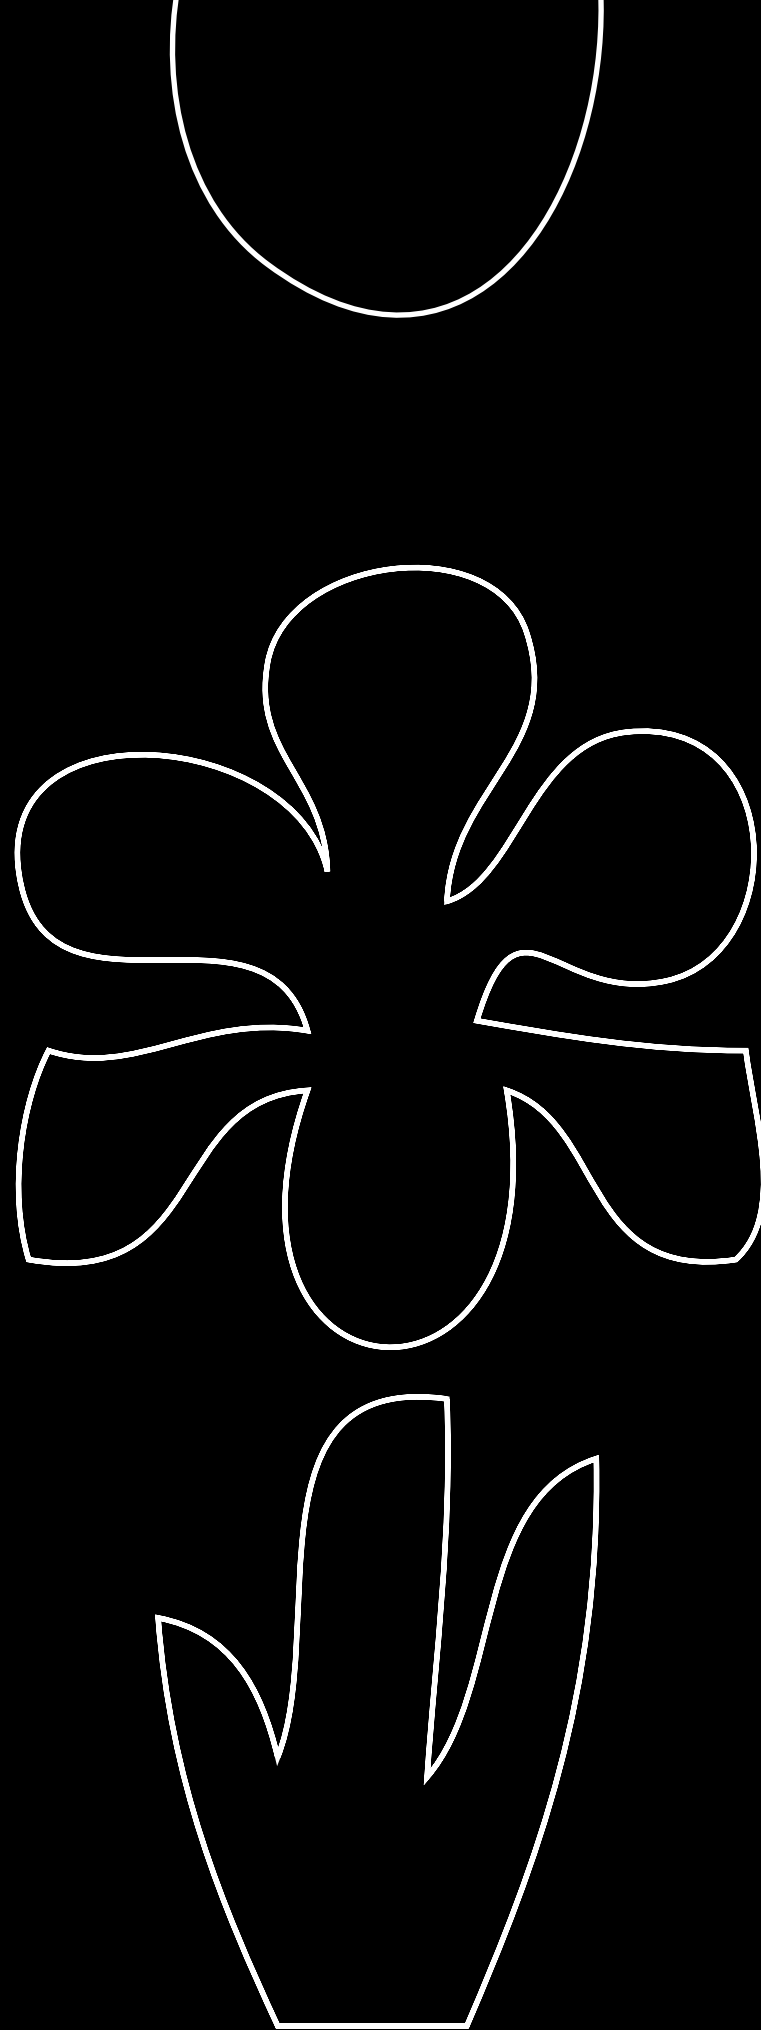


Maiolica





Maiolica Wall Collection

Glossy 4" x 12"



Glossy 4 x 12 754988

Latte



Glossy 4 x 12 754989

Crema



Glossy 4 x 12 754980

Ocra



Glossy 4 x 12 754981

Arancio



Glossy 4 x 12 754983

Rosso



Glossy 4 x 12 754991

Prugna



Glossy 4 x 12 754982

Corda



Glossy 4 x 12 754984

Mela



Glossy 4 x 12 754990

Acquamarina



Glossy 4 x 12 754985

Mare



Glossy 4 x 12 754986

Grigio



Glossy 4 x 12 754987

Nero



Maiolica Ocra Wall 4" x 12"

4"
X
12"
WALL
TILE



Maiolica Corda Wall 4" x 12"



Maiolica Latte Wall 4" x 12"

Maiolica Wall Tech Specs

PHYSICAL PROPERTIES

CALIBRATED

Nominal Size

Caliber Range

Warpage Edge

Warpage Diagonal

Wedging

RECTIFIED

Nominal Size

Caliber Range

Warpage Edge

Warpage Diagonal

Wedging

ALL GLAZED WALL TILE

Mounting

Thickness³

Bond Strength

Water Absorption

Color Uniformity²

Crazing Resistance

Thermal Shock

Chemical Resistance

Stain Resistance

Breaking Strength

Resistance to Freeze/Thaw Cycling⁴

TEST

ASTM C499

Variation from average facial dimension of sample, tested per ASTM C499

ASTM C485

ASTM C485

ASTM C502

ASTM C499

Variation from average facial dimension of sample, tested per ASTM C499

ASTM C485

ASTM C485

ASTM C502

Section 9.5

ASTM C499

ASTM C482

ASTM C373

ASTM C609 and Section 9.3

ASTM C424

ASTM C484

ASTM C650

ASTM C1378

ASTM C648

ASTM C1026

GLAZED WALL TILE SPECIFICATION⁵

MINIMUM

-2.00%

-0.30% or -0.04 in (1.0 mm)¹

-0.30% or -0.04 in (1.0 mm)¹

-0.30% or -0.05 in (1.3 mm)¹

-0.40% or -0.05 in (1.3 mm)¹

-2.00%

-0.25% or -0.03 in (0.8 mm)¹

-0.30% or -0.04 in (1.0 mm)¹

-0.30% or -0.05 in (1.3 mm)¹

-0.25% or -0.03 in (0.8 mm)¹

Pass

N/A

≥ 50 psi (0.34 MPa)

P4

N/A

Pass

Pass

As Reported

As Reported

Average ≥ 125 lbf. (1.11 kN) / Individual
≥ 100 lbf. (0.44 kN)

As Reported

MAXIMUM

2.00%

-0.30% or -0.04 in (1.0 mm)¹

-0.40% or -0.05 in (1.3 mm)¹

-0.40% or -0.07 in (1.8 mm)¹

-0.40% or -0.05 in (1.3 mm)¹

2.00%

-0.25% or -0.03 in (0.8 mm)¹

-0.40% or -0.05 in (1.3 mm)¹

-0.40% or -0.07 in (1.8 mm)¹

-0.25% or -0.03 in (0.8 mm)¹

Pass

Range: 0.031 in (0.079 mm)

P4

VO - 3 Judds

As Reported

As Reported

As Reported

¹ Whichever is less ² Class VO Tile Only ³ May not apply to textured surfaces or tiles with uneven back patterns ⁴ When installation subject to freeze/thaw conditions

⁵ These specifications do not include pressed floor tile, porcelain tile, quarry tile, nor mosaics, when used on walls.



Maiolica Wall Packaging

PRODUCT	SIZE	BOX PIECES	BOX SF	PALLET BOXES	PALLET SF	THICKNESS	WEIGHT LB/SF
Wall Tile	4 x 12	34	10.98	-	-	7	2.83